




J3L-48C / J3H-75C pneumatic knifeholders

For paper, board, film, plastic, textile, laminates, fibreglass, nonwoven, rubber, aluminum, etc....

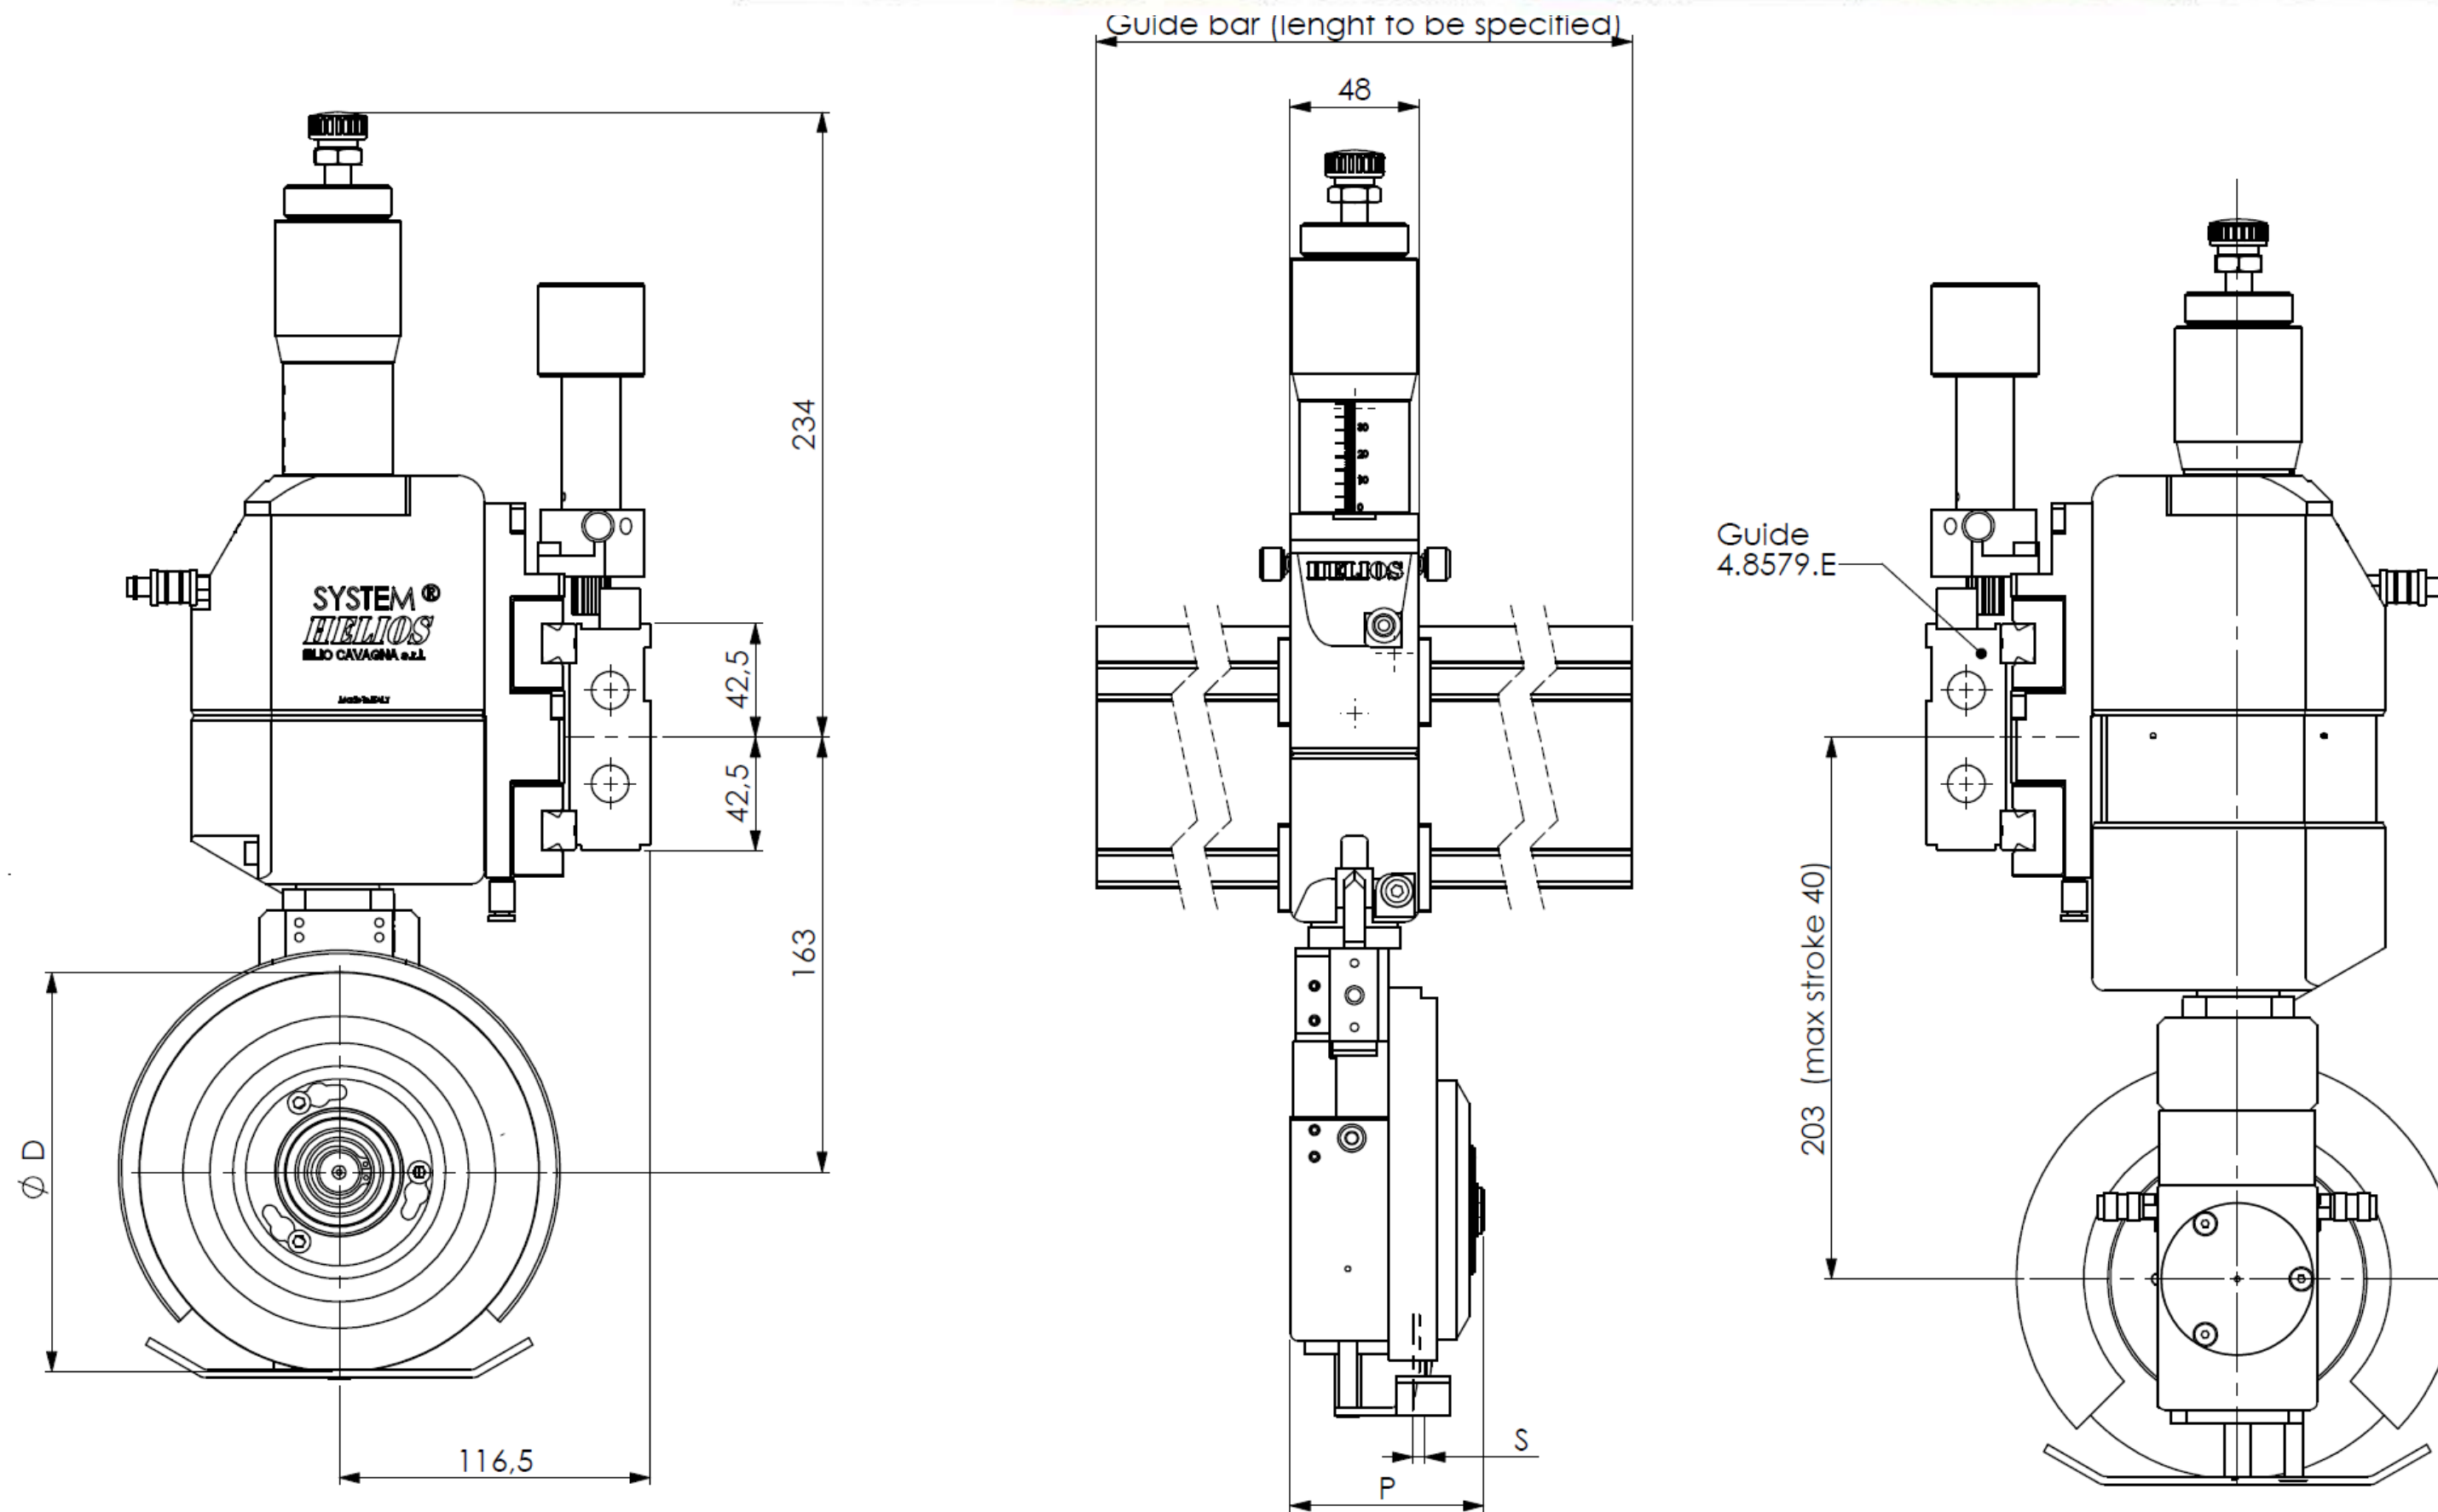


Knifeholder type	Ø D	P	S
J3 48 C	130÷150÷180	48	2,5
J3 75 C	130÷150÷180÷200	75	3,5


*Ask for Feasibility

For any information specific to your application please contact us

Max speed	1500m/min (48C) 2500m/min (75C)
Min. slit	50mm (48C) 75mm (75C)
Blade stroke, max	40mm
Paper, board	Up to 600gr/m ² (48C) Up to 1500gr/m ² (75C)
Laminate	Up to 600gr/m ² (48C) Up to 1500gr/m ² (75C)
Plastic, Film/Sheet	from 25µ to 1000µ (48C) from 25µ to 2000µ (75C)*
Nonwoven	Up to 600gr/m ² Up to 1000gr/m ²
Textile	Ask
Aluminium	from 25µ to 500µ (48C) from 25µ to 500µ (75C)
Rubber	Ask
Fiberglass	Up to 500gr/m ² Up to 1000gr/m ²

Indicative values, for alternative materials ask for our evaluation

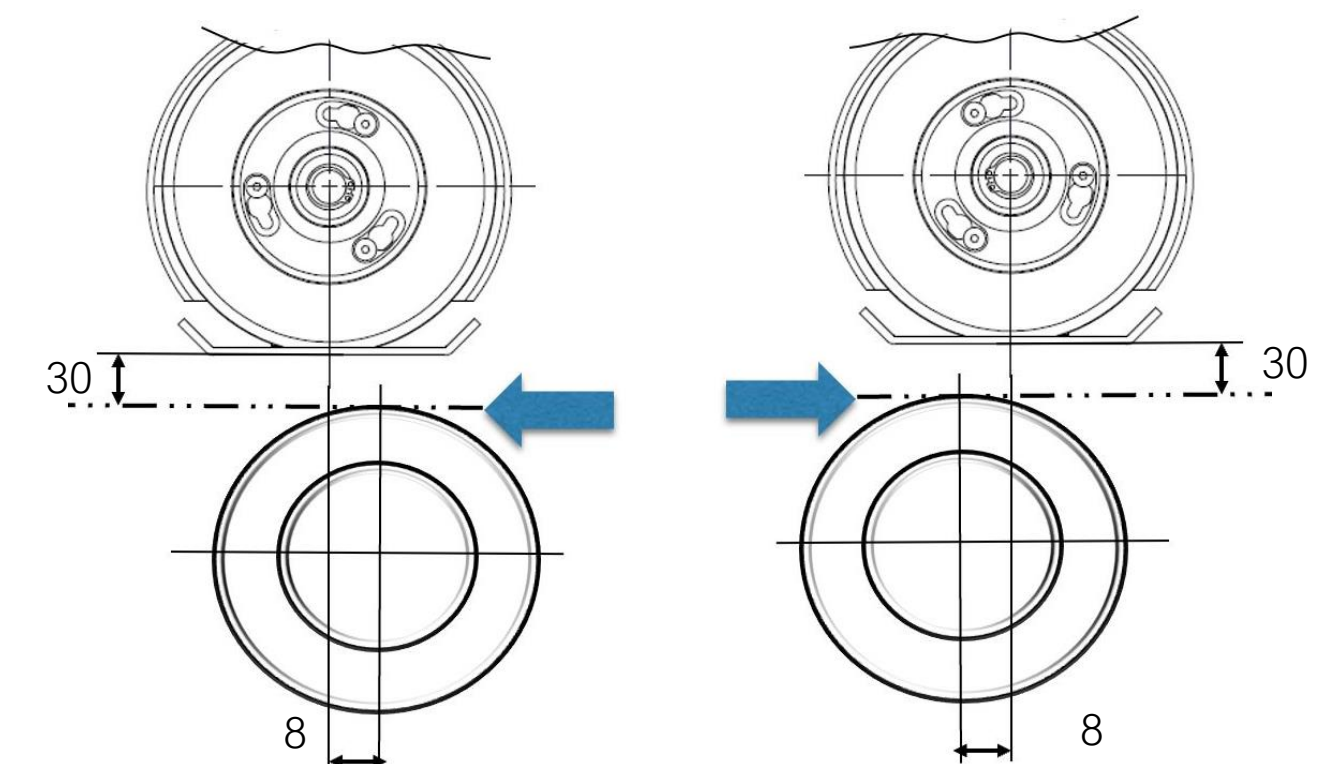

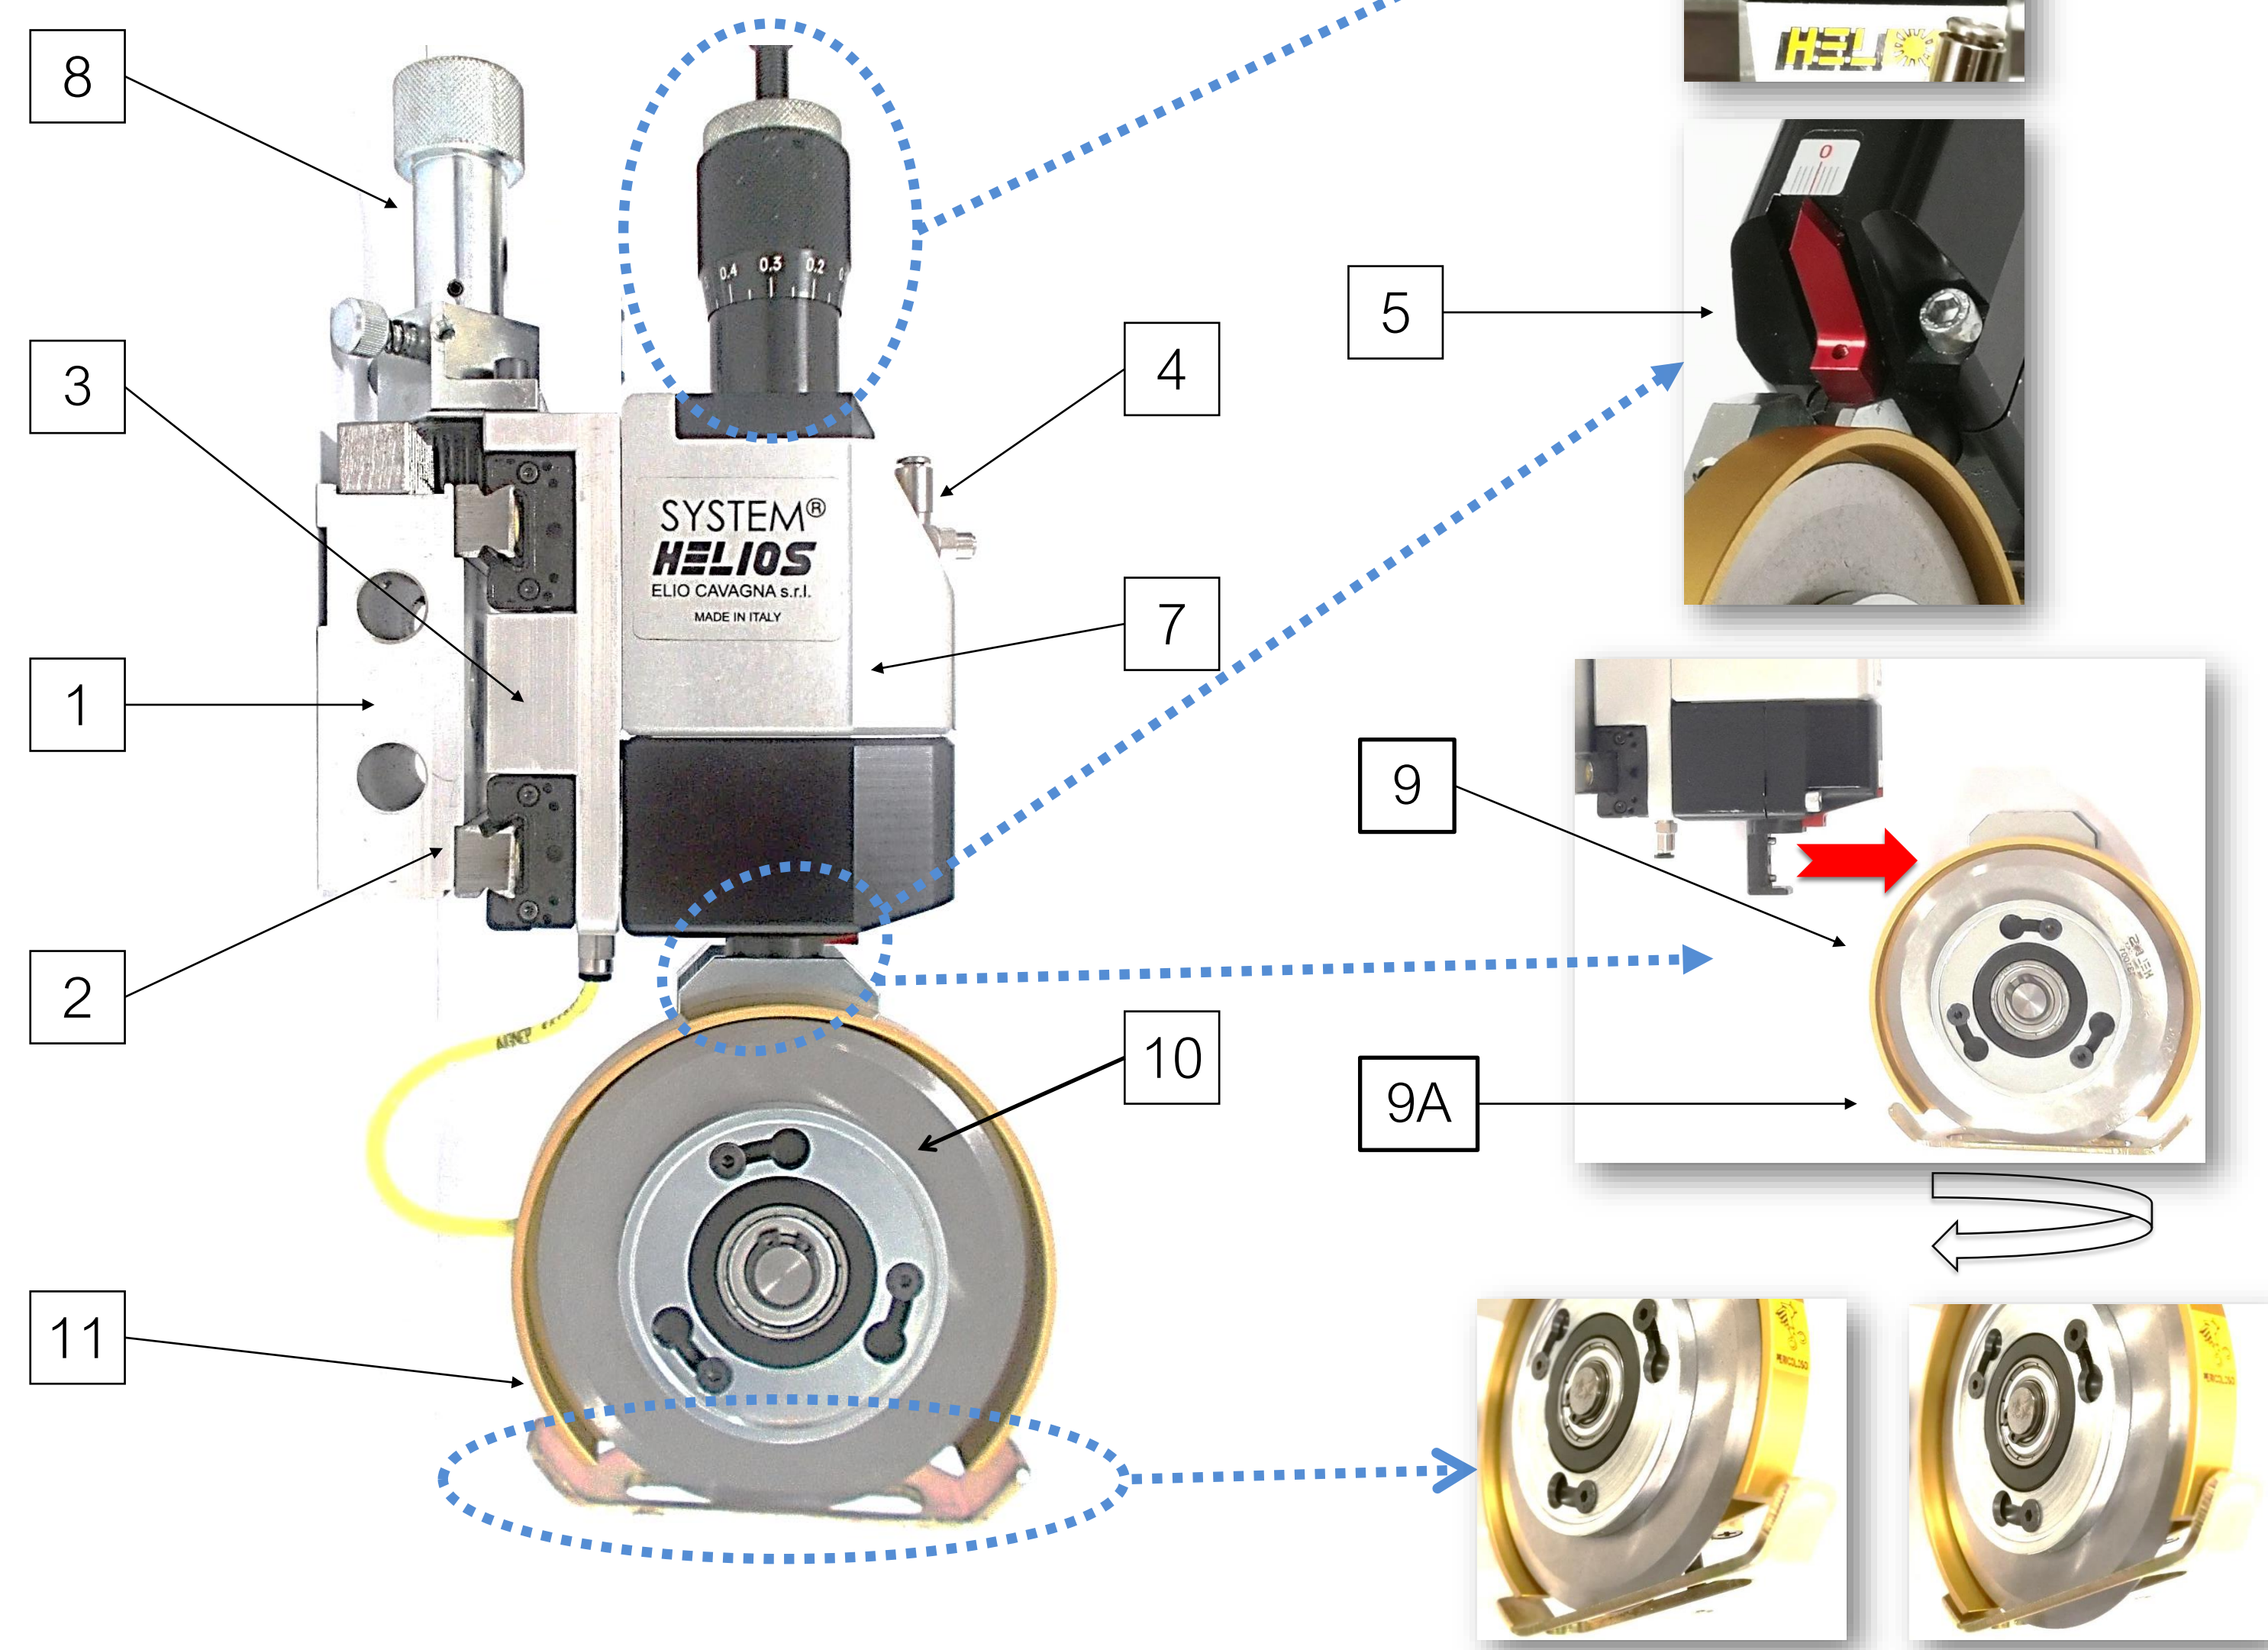


MAIN FEATURES

1. Double rail guide
2. Double linear bearing
3. Pneumatic brake
4. Blade descent and side stroke with single alimentation
5. Blade cutting angle adjusting from 0 to 2°
6. Blade depth regulation, with nonius
7. Body with double piston for blade descent
8. Knob with pinion for movement
9. Frontal head extraction
 - 9 A. 180° head rotation
10. Bayonet blade assembling
11. 360° automatic blade protection

OPTIONAL LIST

LASER TO CHECK BLADE
POSITION

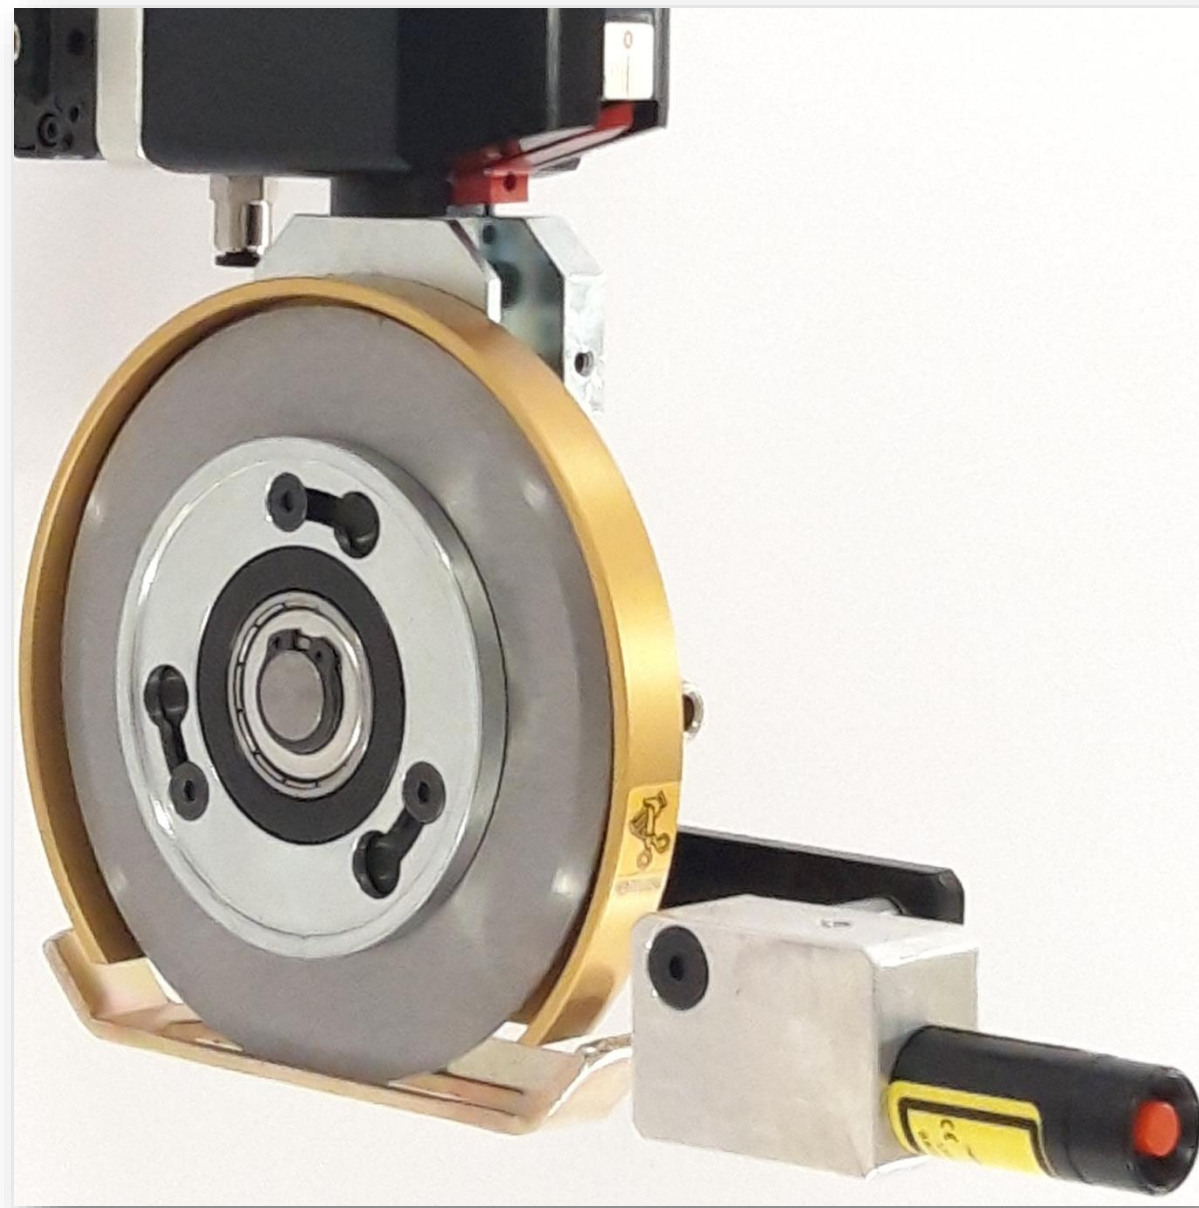

PLEXIGLASS
SIDE COVER FOR BLADE



COVER FOR DUST
EXTRACTION



FELT FOR BLADE
LUBRICATION



INTERCHANGEABILITY
WITH RAZOR BLADE

