



JS2-TL90C

pneumatic knifeholders


For paper, film, plastic, textile, laminates, fibreglass, nonwoven, rubber, aluminum, etc....

Paper	No
Plastic, Film	<30μ
Non woven	No
Max speed	Depend from razor steel
Min. slit	40mm
Blade stroke, max	12mm


Indicative values, for alternative materials ask for our evaluation

Interchangeable with shear cut knifeholder JS2-40C

For any information specific to your application please contact us

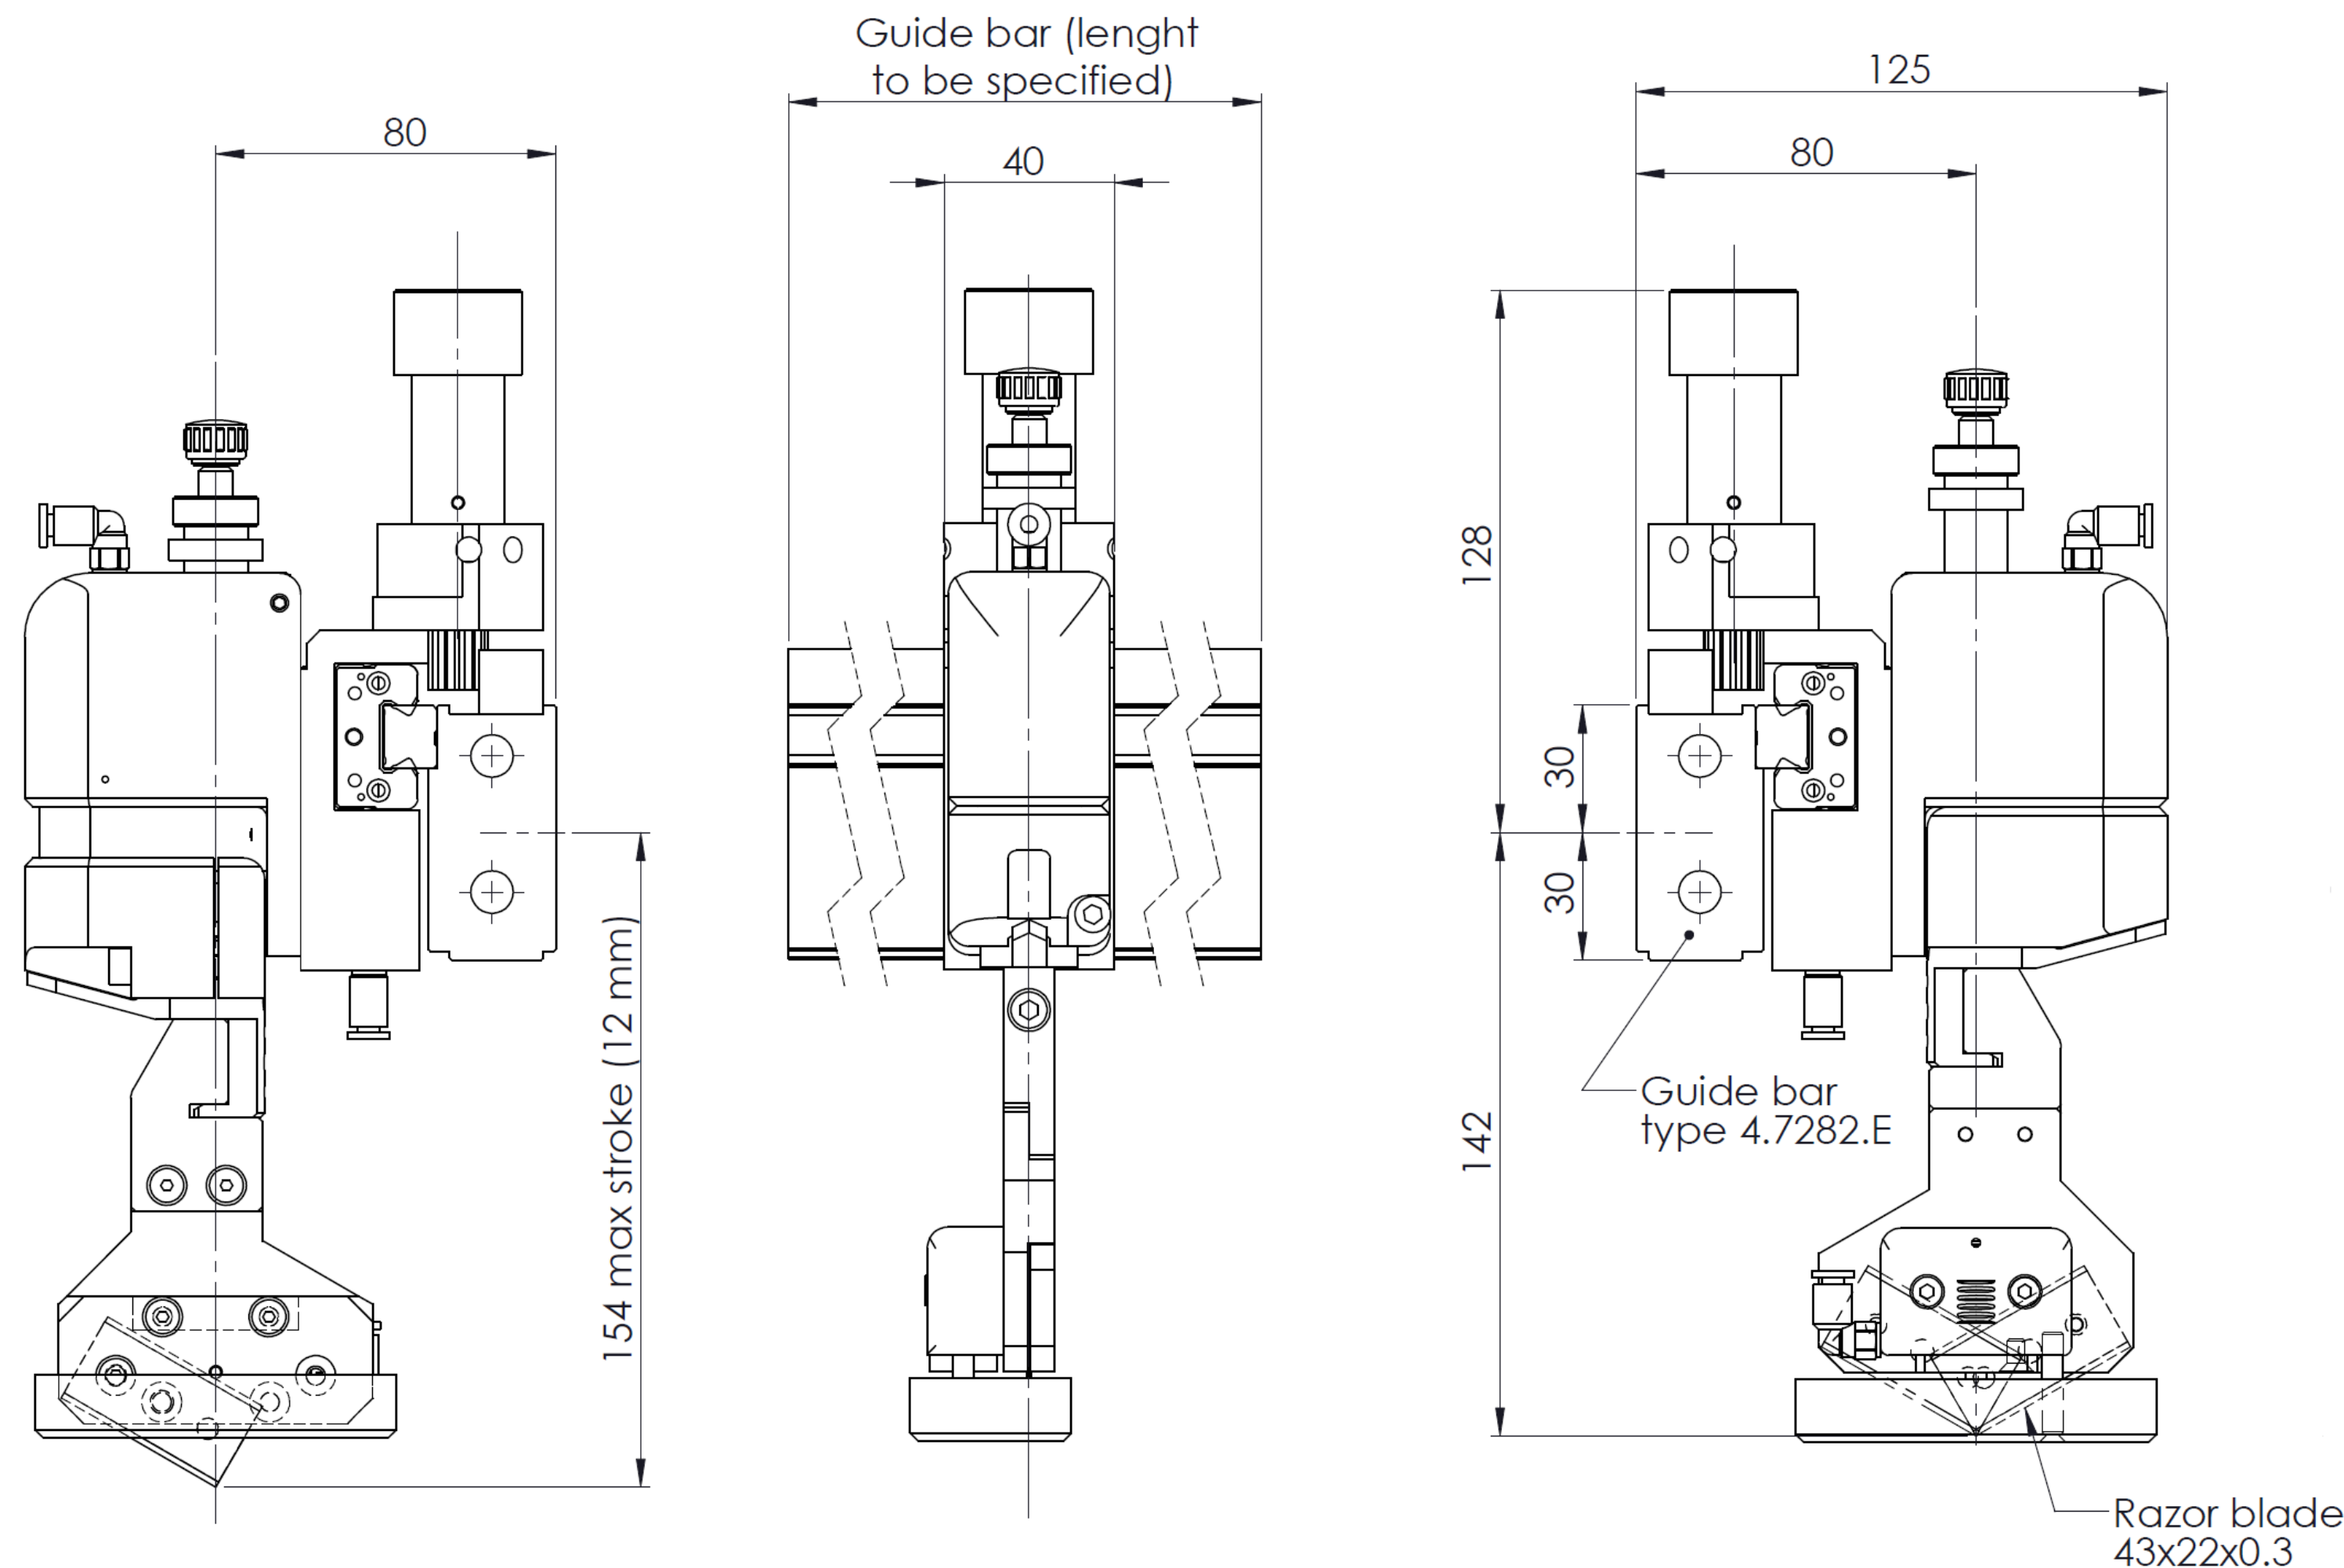

JS2-TL90C pneumatic knifeholders

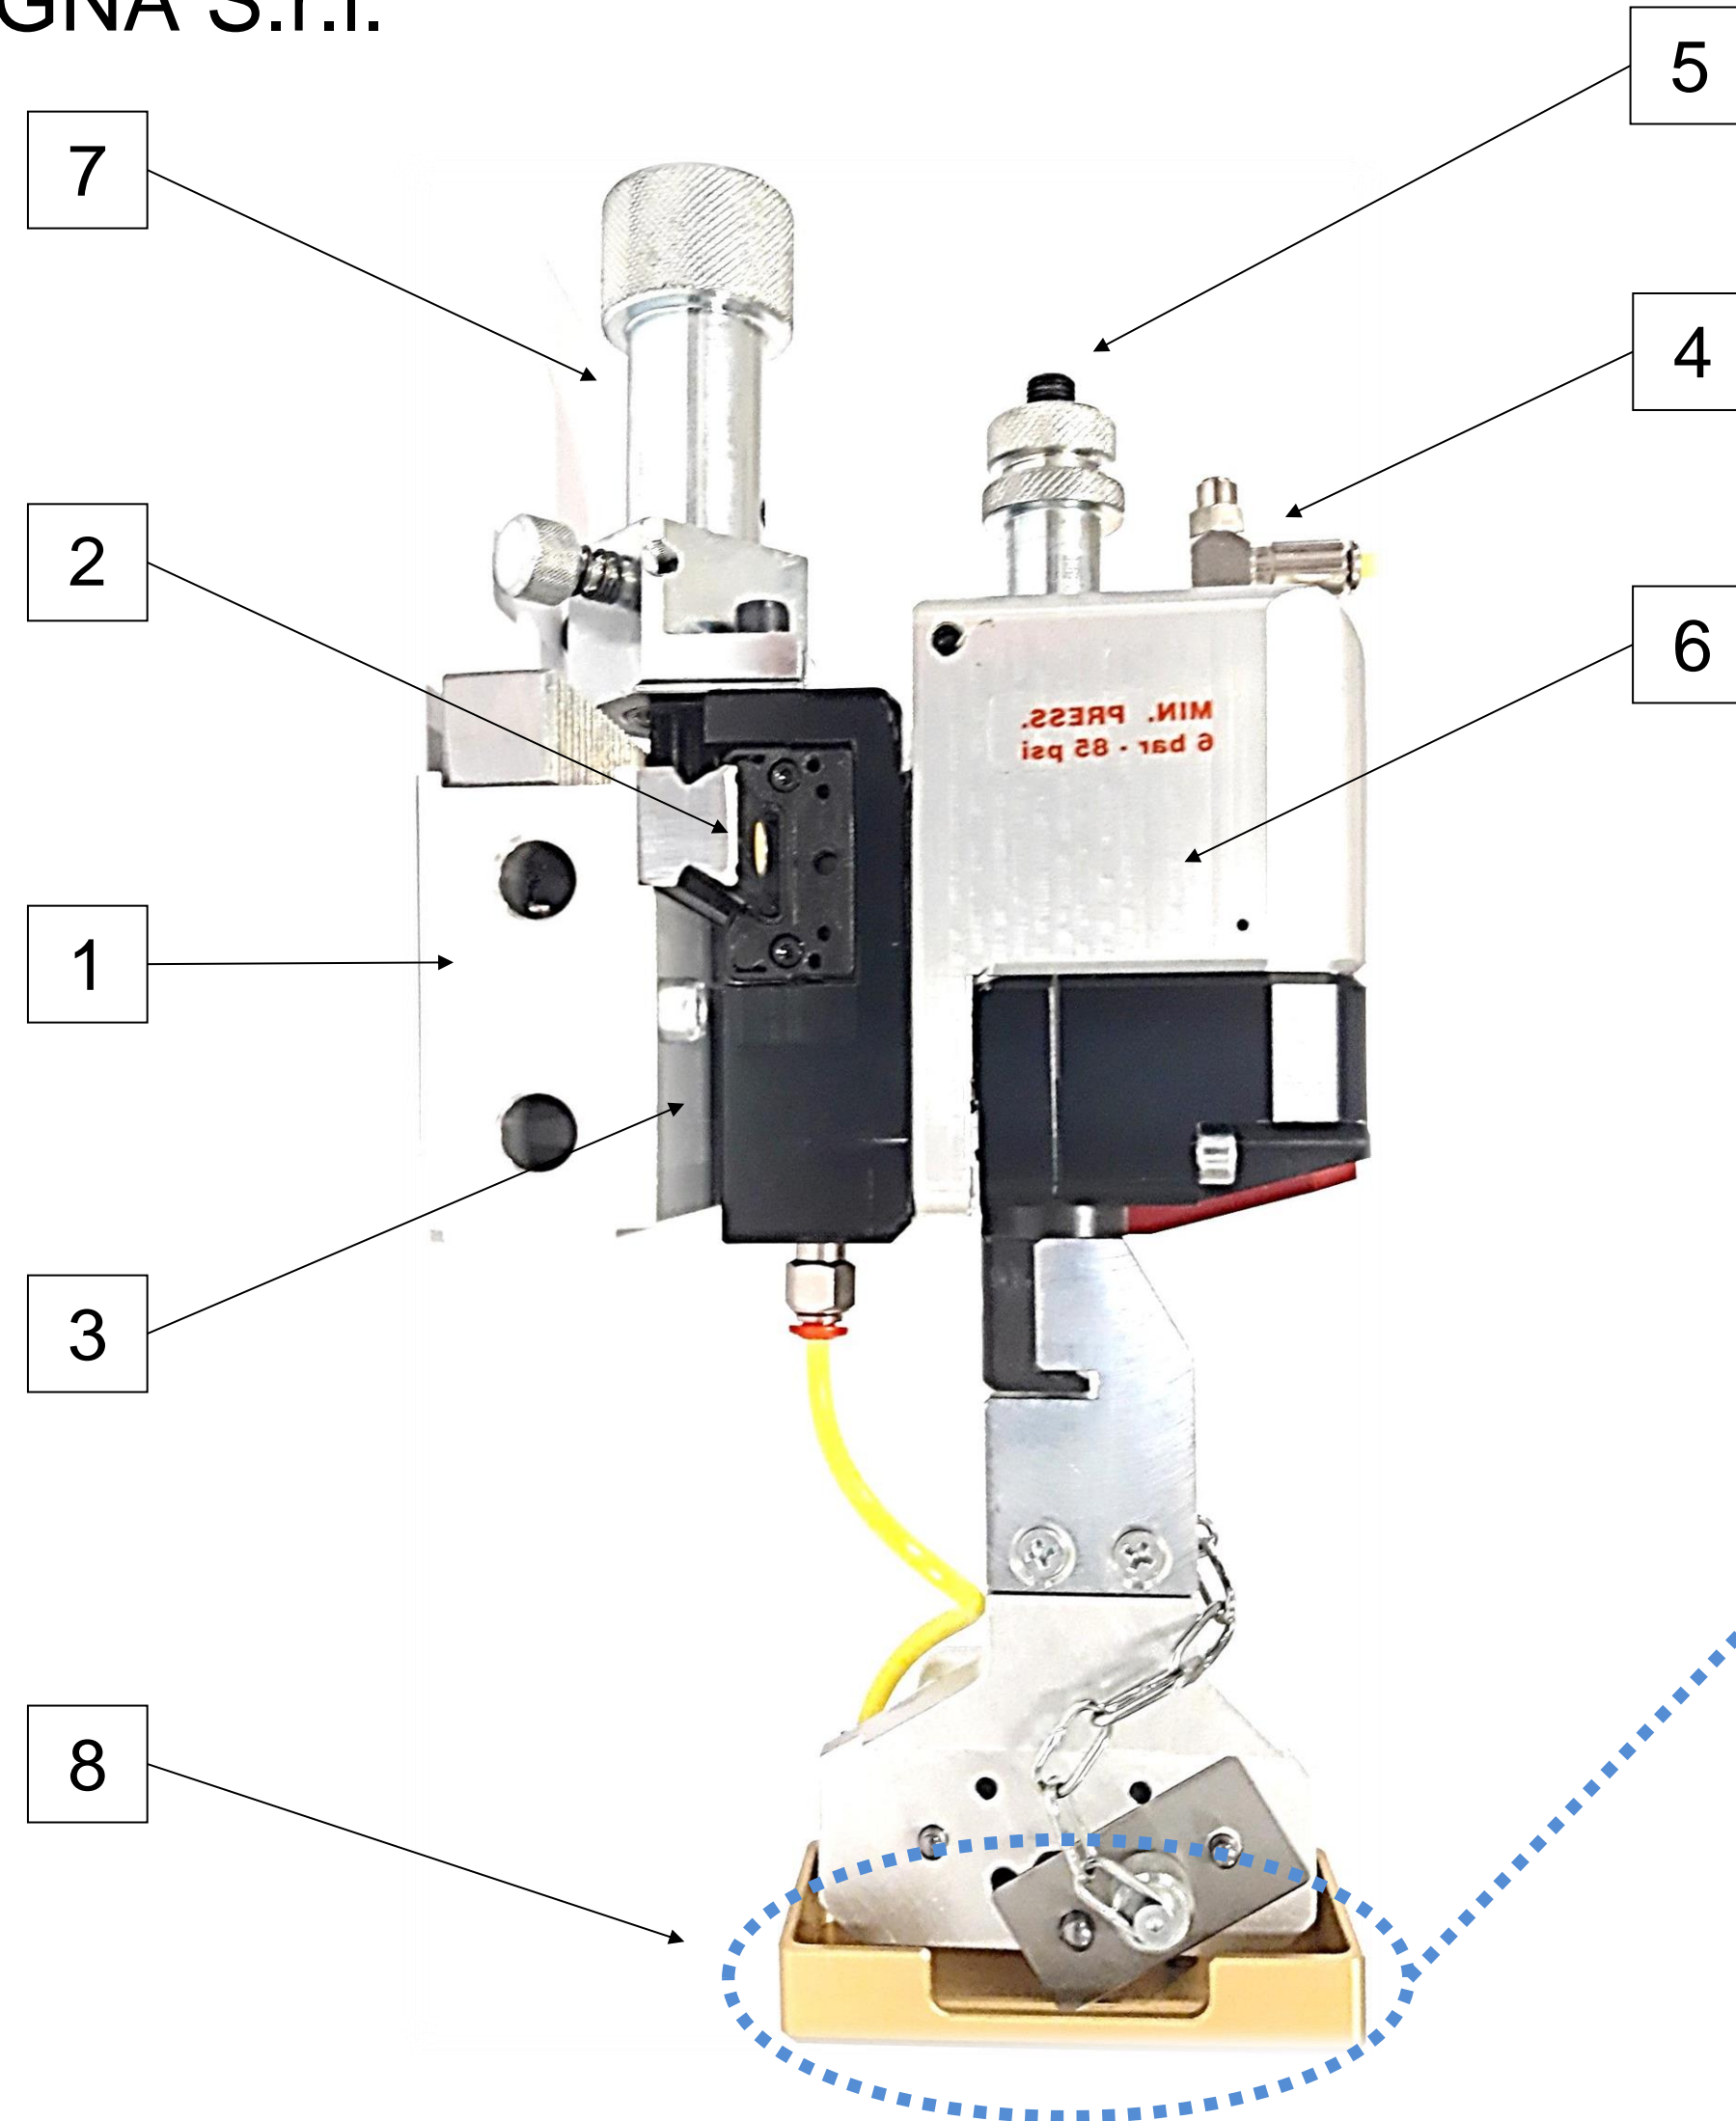

MAIN FEATURES

1. Single rail guide
2. Single linear bearing
3. Pneumatic brake
4. Air intake for blade descent
5. Blade depth regulation, without nonius
6. Body with double piston for blade descent
7. Knob with pinion for movement
8. Razor blade protection

